

# Usability Testing of Video Game Controllers

## *A Case Study*

Gareth W. Young, Aidan Kehoe, and David Murphy

### CONTENTS

Executive Summary	146
Organization/Institution Background	146
Introduction	147
Background	147
Case Study Description: Device Evaluation Techniques	150
Controller Variables for Consideration	152
Description of Controllers for Analysis	154
Logitech G303 Daedalus Apex Mouse and Corsair K60 Vengeance Keyboard	154
Logitech Touchpad T650 and Logitech Ultrathin Keyboard	155
Steam Controller	156
Sony DualShock 4	157
Case Study 1: Functionality Testing of Video Game Controllers	157
Participants	157
Experimental Procedure	157
Results and Discussion	158
Pointing Task Results	158
Move Time	160
Errors	161
Linear Regression	162
Usability: Pointing	162
Smoothness of Operation	163
Mental Effort Exerted during the Task	165
Accuracy of the Device in Pointing	165
Speed of the Cursor Movement	166
Overall Evaluation	166

User Experience: Pointing	166
Case Study 2: In-Game Testing of Video Game Controllers	168
Participants	168
Experimental Procedure	168
In-Game Results	169
Usability In-Game	169
Evaluation of Physical Force Required for Moving	169
Difficulty in Accurately Moving and Aiming	169
Overall In-Game Evaluation	169
User Experience: In-Game	171
Differences between Pointing and In-Game Analysis	172
Significant Variations in Usability Testing	172
Significant Variations in User Experience Testing	175
Conclusions	175
Challenges, Solutions, and Recommendations	176
References	176
List of Additional Sources	178
Biographies	179
Key Terms and Definitions	179
Appendices	180

## EXECUTIVE SUMMARY

This chapter presents an investigation that compares the performance of game controllers in two-dimensional pointing tasks as defined in the international standard that specifies the requirements for nonkeyboard input devices, ISO 9241-9. In addition, we discuss the evaluation of usability and user experience with these devices during gameplay. We compared performance measurements for controllers while varying the user's exposure to the different feedback elements contained within each controller device. We assessed the performance of the controllers according to the ISO 9241-9 evaluation recommendations. The devices used in the study included a Logitech mouse and keyboard, a Logitech Bluetooth Touchpad and keyboard, a Sony Playstation DualShock 4 controller, and Valve's first-generation Steam controller. Besides performance testing, we measured user experiences with the controllers while playing a popular first-person video game. Participants were asked to complete game levels for each type of controller and answer questions outlining their experience.

## ORGANIZATION/INSTITUTION BACKGROUND

The case studies contained within this chapter were undertaken at the Logitech Design Lab in Cork, Ireland, in collaboration with the Department of Computer Science at University College Cork. Logitech is a world leader in products that connect people to the digital experiences they care about. Their products span multiple computing, communication, and entertainment platforms. Logitech-gaming products include mice, keyboards, headsets, and gaming controllers. University College Cork was founded in 1845 and is the academic home of the founder of Boolean Logic, George Boole.

## INTRODUCTION

Currently, there is a considerable range of research into the development of contemporary game controllers, while there is relatively little research being conducted to explore the relationship between pointing performance and in-game user experiences (The Entertainment Software Association, 2014). The choice of a controller used can have a major impact on the player's experience of a game (Birk and Mandryk, 2013). The performance of a user while playing a game can also be strongly influenced by the type of controller used (Watson et al., 2013). Certain platforms are synonymous with particular types of controllers, while others are transferrable across platforms. The effects of any one of the varieties of control methods used in a smartphone or tablet device are also potentially viable control methods for new console or PC controller devices. Fortunately, there is a large body of well-documented research in human–computer interaction (HCI) and game console controller analysis, and the associated frameworks and models of these can be applied in the development and evaluation of new forms of game controller interaction.

In terms of in-game control, the relationships between the action–feedback cycle and the central role it has in game play are important aspects of game controller integration. The user must have a sense of control that directly relates to their actions; this in turn works to reduce potential frustrations and enhances the user's participation in the game. The control of a game is after all, the product of a well-designed interaction with game controllers. Historically, the technological limitations of the era were responsible for shaping controller designs. All in-game interactions, such as running, shooting, and kicking, among others, were represented by arbitrary button presses and gestures that were not intrinsic or relatable to the overall gameplay design. In comparison, with today's gesture capabilities, we can now physically manipulate wireless devices to directly control in-game components that may correspond with real-world equivalent operations. This level of correspondence between the artificial and real-world control interactions reduces the learning curve for players, making it more “intuitive” and increases the user's immersion in the game. The mapping of control to in-game actions has been shown to correlate with total immersion experienced by a user (Jennett et al., 2008). Also, the role of interactivity in gaming enjoyment has been observed as declining when efficacy experiences are finite (Klimmt et al., 2007). Therefore, we can conclude that the control mechanisms of gaming interfaces are influential in some way to the greater, overall gaming experience.

## BACKGROUND

Early control mechanisms of digital games were simple, as were the games that were used to control. However, contemporary platforms are capable of capturing multiple forms of interaction using sophisticated motion capture sensor technology. Indeed, the spectrum of digital game genres has increased and become quite diverse. This near-endless range of interactive games allows players to experience various different forms of immersion, for example, while waiting on a train or relaxing at home (Thompson et al., 2012). Game designs that were once limited to high-end PCs or specific gaming consoles are now available on mobile devices, online platforms, and are increasingly moving toward an Internet of Things platform for gaming. This opens up the potential for a true ubiquitous “play anywhere, with anyone, at

anytime gaming.” Examples of this trend include the Grand Theft Auto series, which is now available across a number of very different platforms, from Google Android devices to the Microsoft Xbox console. Increased availability and a variety of gaming platforms presents new challenges, and highlights limitations of both game design and the conventional consumption models, issues that did not exist on older static platforms.

The development of controllers for platform-specific games has historically been restricted by the system’s processing power and speed. Consequently, in static gaming, the graphics-processing units of platforms are superior in performance to address the demands of high-end game engines. In comparison, the ability to perform multiple tasks on a mobile device takes precedence over pure gaming performance. For example, a smartphone must possess the ability to make phone calls, text, e-mail, etc., in addition to its game-processing capabilities. The limitations of mobile devices have resulted in the development of novel interaction methods, which are now becoming common in conventional game controller interfaces. For example, the use of virtual thumbstick widgets in lieu of physical thumbstick controllers, touch-sensitive surfaces, and built-in speakers. The compact form factor of mobile devices incorporating a host of various sensors has opened up new and interesting avenues of game interaction. These include, but are not limited to, gesture-controlled touchscreens, accelerometers, gyroscopes, magnetrons, cameras, and microphone interfaces to name a few, which are rarely implemented or to be found in a PC or console platforms (a notable exception to this being the Wii console).

Notwithstanding this array of adaptable input choices for game developers to choose from, there are still some traditional gaming styles that are struggling to adapt to multiple platforms. For example, First- Person Shooter (FPS) games, such as *Wolfenstein* and *Doom* (widely considered among the first three-dimensional [3D] FPS games), would have to rethink how user input would control game characters if they were to release the same game today (id Software, 1992, 1993). Control adaptations are increasing in popularity, such as those seen in games like *The Drowning* (DeNA Co., 2014); however, this can sometimes result in a deviation from traditional FPS physical interfaces and losing the associated affordances of controllers that consumers of this genre have become accustomed to. In addition, specific game genres rely on these standardized and accepted control schemes.

As mentioned earlier, there are several mechanisms that can be used to control games on multiple devices. These too can be influential to the overall gaming experience, specifically, the innate naturalness of user gestures required and their relationship to the actions transpiring on-screen (Skalski, 2011). Players may have certain expectations with controls that they are already familiar with in the real world, for example, steering wheels (McEwan et al., 2012). Using a new controller requires some form of learning; however, this should transpire in a streamlined and continuous manner. This leads to interactions that come naturally to the user when they transfer to alternative platform controllers. This naturalness relates to the user’s perception of interactivity based on their previous experiences with interactive technologies and how new control methods need to be predictable, logical, or in line with experientially based expectations. Gamers with prior experience of FPS games will have been conditioned, through repeated measures, to find certain interface paradigms more accessible than others. Players switching to a new platform and/

or controller experience more usability issues and consider themselves more challenged during that transition phase (Gerling, 2011). When designing a new controller, it is very important to consider the users' expectations of device affordances and their applicability to the particular game genre.

Many of the innovative changes in game controller design are associated with a specific gaming platform and in the first generation of commercial controllers, the technological constraints of the platform limited input gestures to small finger movements and button presses. Playing early arcade/video games involved minimum movement to trigger an in-game response. However, recent trends in large-scale controller movements have resulted in comparable levels of engagement and enjoyment in game play. For example, in their work on controller movement, Zhang et al. found that participants responded positively to increased physical exertion in certain gaming conditions (Zhang et al., 2009). Moreover, large-scale actions have been incorporated into popular contemporary games, through the use of advanced controllers, for example, the Microsoft Kinect, Sony Move, and Nintendo Wiimote. However, the size, number, and rate of gestures, bounded by limitations of the controller, the size of the required gesture, and/or the overall level of physical interaction (exertion), do not necessarily have any impact on the gaming experience.

In-game experiments have shown that tilting controls have substantially increased user immersion when applied to associated steering tasks, such as driving (Cairns, 2014). In addition, a slipping mechanism (sliding a finger over a touch-sensitive input device) can achieve deeper immersion than single-touching gestures alone. Participants have been observed moving fingers in sympathy to character motion, suggesting that users were experiencing a direct connection with the game via finger contact. The role of natural mapping, such as these, promotes a deeper immersive experience and is more fun, even if performance is not as good on initial use (Brown et al., 2010). Older gamers have been reported to perform best with a mixed button and gesture controller (such as the Wii) (Pham, 2012). This study showed that the older generation of gamers performed better with a combined button/gesture device in terms of completion time, when compared to these two control elements presented individually. Therefore, when designing new game controller devices, we should consider the importance of combining different modalities of gesture capture as equally important factors.

Further evaluations of gestural control input methods have highlighted a preference for them over classic controllers in the home entertainment environment (Natapov et al., 2009). The Wii controller has been shown to be the most preferable option when undertaking pointing tasks when compared to classically styled controllers (Microsoft Xbox 360 and Sony PlayStation 3). The wider acceptance and intuitive freedom of gesture capture as an input parameter is in fact attributable to the commercial success of this device (ESRB, 2014). Here, the targeting task refers to pointing to a selection on a screen with a cursor or other marked element and selecting it. In comparison, a nonpointing task would be the navigation of an in-game character (or avatar) and is generally performed with an analog joystick/thumbstick, or the "WASD" keys on a keyboard, where WASD is essentially a copy of the arrow keys, for instance, taking the logical mapping and making it available on the nondominant hand.

In most contemporary console game controllers, the inclusion of analog thumbsticks has become an industry standard as the thumbstick naturally implies direction. The throughput (TP) of a thumbstick is generally equivalent to that of the analog joystick. Targeting tasks are common on most nontouchscreen systems and can be interpreted by a device in a number of ways, such as selecting a file to open on a PC or targeting an on-screen enemy during gameplay. Specific to gaming, these two types of tasks (movement and selection) are combined together to create position and rate control of on-screen actions. The ability to accurately point at a target (on a standard X–Y Cartesian plane) and to control the rate of movement (Z plane) has become the norm in gesture design.

### CASE STUDY DESCRIPTION: DEVICE EVALUATION TECHNIQUES

The evaluation of nonkeyboard input devices in computing is strongly influenced by the ISO 9241-9 standard (ISO, 2000), a standardized approach to interface evaluation. This includes performance, comfort, and overall analysis techniques for a multitude of potential functions. Fitts' index of performance (Fitts, 1954; MacKenzie, 1992) is used to assess the functionality of a controller and evaluate the effectiveness of its implementation. However, no single-evaluation technique suits the multiparametric control input that occurs during gameplay. Therefore, in our study, a number of validated techniques were included to analyze the individual devices. The assessment of comfort rating, as described in ISO 9241-9, and additional open-ended questioning were used to rate pointing ability, comfort, usability, and user experience.

Multiple experiments that analyze input devices have been used in the validation of ISO 9241-9. Indeed, these findings were used to inform our best-practice methodology in our experimental design. One such evaluation undertaken to assess the techniques incorporated in ISO 9241-9 used comparisons of joystick and Touchpad performance and comfort, finding a 27% increase in joystick TP over the Touchpad (Douglas et al., 1999). The most important deviations from the ISO standard suggested by Douglas et al. included using 12 participants for between-subject conditions instead of the recommended 25; they suggested that their experiment methods be adopted as an alternative approach; a multidirectional task is more ecologically valid; more open-ended questioning is required for comfort. For our experiments, these factors were considered to be important for the validity of our study. Additional points were also derived from the recommendations made by Soukoreff and MacKenzie (2004). Specifically

1. The Shannon formulation for index of difficulty (ID) should be applied (Equation 7.1).
2. A wide and representative range of ID values are to be used.
3. Error rates should be incorporated for individual ID values.
4. Adjustments for accuracy should be made to convert ID values into index of difficulty with error correction (IDe) (Equations 7.4 and 7.5).
5. Linear regressions should be calculated to ensure a goodness of fit and to verify a small intercept value (<400 ms for positive regressions and >–200 ms for negative, Equation 7.2).

6. No predictions should be made beyond the range of IDe.
7. The dependent measure of TP is to be calculated via the mean of means for each device.

$$ID = \text{Log}_2(D/W + 1) \quad (7.1)$$

$$MT = a + b \times \log_2(A/W + 1) \quad (7.2)$$

$$TP = ID/MT \quad (7.3)$$

$$IDe = \text{Log}_2(D/We + 1) \quad (7.4)$$

$$\begin{aligned} We &= W \times 2.066/z(1 - \text{Err}/2) \text{ if Err} > 0.0049\% \\ &= W \times 0.0589 \text{ otherwise} \end{aligned} \quad (7.5)$$

While there are many advantages to using the standardized Fitts' Law and ISO-testing methods, they do not accurately portray targeting tasks in gaming situations (e.g., FPS gaming). Game controllers offer multiparametric controls for translating gestures into on-screen action; accordingly, the analysis of control in these circumstances should be augmented to better fit targeting tasks in three dimensions. Simulation and analysis of 3D Fitts' testing has highlighted increased performance of mice and traditional console controllers over open-gesture capture devices (such as the Microsoft Kinect and Sony Move). These devices were also shown to require a heightened spatial awareness than that of the traditional mouse and controller interface (Zaraneck, 2014) and were therefore not considered for our experiment. Here, we have concerned ourselves with the 3D application of control in in-game environments, which also requires consideration of the zero- and first-system ordering of sensor modalities that are distributed between the left and right effectors of the body.

Additional elements of game controller evaluation included in this case study are derived from the theoretical framework provided by McNamara and Kirakowski (2006), providing further insight into human–technology interactions (see [Figure 7.1](#)) (McNamara and Kirakowski, 2006). This model has been applied to many human–computer evaluations that have allowed researchers to clearly understand the interactions between humans and controllers. Three codependent factors are modeled to represent these interactions. Specifically, functionality, usability, and user experience measures are used to quantify the various features of an interface and the impact that they may have upon a user.

Functionality tests are performed to determine if the features a device affords are practical, as well as evaluating the performance, consistency, and the robustness of the applied designs. The assessment of usability is used to raise issues of efficiency, effectiveness, and






FIGURE 7.1 Functionality, usability, and user experience. (From McNamara N. and J. Kirakowski. Functionality, usability, and user experience: Three areas of concern. *Interactions*, 13(6), 2006: 26–28.)

user satisfaction. Assessing a user's experience is a relatively new and innovative area of investigation within the field of HCI. Measurements are difficult to quantify and can be dependent on a number of contributing factors, including psychological or social factors.

These three types of tests, although unique, do not operate independently of each other. For example, we do not consider usability as a defining-device characteristic. However, the physicality of a device, in terms of its functionality and how the user operates it, directly influences its usability. Also, a system's aesthetic beauty can influence the user's perception of usability and their physical experience with the device before actually using it (Tractinsky et al., 2000). Finally, a device's usability directly influences the user's experience, as poor usability will almost certainly lead to a negative user experience. Therefore, we can see that the assessment of each of these areas of concern is achieved through the application of multiple HCI techniques and is not focused on one alone.

## CONTROLLER VARIABLES FOR CONSIDERATION

The cognitive load on users to operate game controllers can be categorized in an increasing order of complexity (Proctor, 2011). Teather and MacKenzie recently found that the order of control is a greater determinant of performance than the actual input method. In their experiment for both position-control modes (tilt and touch), participants reached game levels roughly twice as high as with the velocity-control modes (Teather and MacKenzie, 2014). In addition, human effectors are capable of making gestures that apply either force/torque or displacement/rotation to a control device. The controller responds to each respectively, corresponding to the input gesture applied. An isometric device connects the effector to the controller and its control is derived through the forces or torques applied. In an isometric system, the cursor moves in response to the forces applied to the controller with little or no displacement. The opposite of this is an isotonic device, which operates by capturing this movement alone. In an isotonic system, the cursor moves in direct response to movement of the controller. Many joystick applications are designed to respond to this force/movement with a spring-like resistance that is proportional to the force required to displace it. After the movement is concluded, the joystick returns to a neutral position when this force is removed. This type of system allows the user to perceive proprioceptive



and kinaesthetic feedback from the controller in addition to the visual feedback of the cursor moving on-screen. In gaming, the PC keyboard and mouse interface combines the zero-order/positional control of the mouse with the first-order/rate control of the keyboard. However, in console controllers, the minijoysticks operate with only first-order/rate control.

While interaction figures for the mouse may be superior to other pointing control methods, they may not be representative of what is best for game control on differing platforms. A mouse requires a stable surface on which to operate, but most mobile or console-gaming experiences are less fixed, for example, reclining on a sofa or waiting for an appointment. This is conducive toward a home entertainment setting rather than a restrictive desktop arrangement. Even though the mouse is conventionally superior for pointing tasks, it is not necessarily the most appropriate for mobile/home entertainment or console-gaming situations. Recent generations of game consoles have each attempted to introduce some form of spatial gesture capture mechanism. The development of such interfaces has been in response to negative findings from complex user interface (UI) navigation with console game controllers. The need for more affective transparent interfaces (ATIs) has developed in recent times. One potential solution is to use common devices such as smartphones/tablets as controllers for console games. Examples of this type of device adaptation in other domains include the smartphone being used to control home automation, SmartTVs, and other entertainment services. Developers have added certain types of game controller functionalities to smartphones, effectively creating a wireless mobile game controller (Leu and Tung, 2014). As this is an emerging trend, at this moment, there is a lack of appropriate testing frameworks to assess the effectiveness of such virtual controllers.

Another factor to acknowledge between the four control methods is the role of haptic feedback in device operations. When considering haptic sensing and control in a gaming performance context, we have to recognize the importance of the multimodal mediation of all our supporting senses in combination. The amalgamation of visual, proprioceptive, kinaesthetic, and tactile feedback all serve to reinforce the user's ego location, in relation to their own position in space and with respect to other objects or persons around them. The user is now able to orientate, evaluate, regulate, and rectify their gestures to support the output of their input device. The removal of haptics shifts and encumbers the supporting information derived from the visual and proprioceptive senses. This moves away from the input-output arrangement in real-world interactions, to one of reaction, and not interaction. To become interactive, a haptic system must adhere to the expectations of signaling for the human body's various senses.

Multimodal sensation incorporates cues that are derived from cross talk between the various senses, as can be seen in the symbiotic nature of audio-visual and audio-haptic senses. On its own, the haptic sense (primary) can serve to convey a particular degree of information, or in a multimodal arrangement the complexity of the signaling increases but results in more comprehensive information, for example, the concurrent audio-visual sensation of stimuli (secondary). Examples of this can be found in practice, for instance, adding button clicks or other interaction noises to a physical interaction. In addition, the physical characteristics of the system may incorporate the forces required for innate

interaction, for example, the force required to activate a key (passive), or feedback that is produced in response to the input action (active), take, for example, a vibratory response.

## DESCRIPTION OF CONTROLLERS FOR ANALYSIS

In this study, we compared four types of game controller interfaces: a Logitech G303 Daedalus Apex mouse and Corsair K60 Vengeance keyboard, a prototype Touchpad interface and keyboard combination (Logitech Touchpad T650 and Logitech Ultrathin keyboard), a concept controller (Steam controller), and a familiar console controller (Sony DualShock 4) (see Figure 7.2). Each of the controllers used during this experiment display certain control order and haptic qualities that serve to further distinguish themselves from each other, for a brief description of operation factors (see Figure 7.3).

### Logitech G303 Daedalus Apex Mouse and Corsair K60 Vengeance Keyboard

The mouse and keyboard were used in our experiment to serve as a baseline for our analysis. The mouse and keyboard interface is very popular among FPS gamers and has over 50 years of research behind it. The mouse controls the player's X-Y (Cartesian plane) targeting cursor (position rate) and the "WASD" key combination functions to derive the Z direction of travel (control rate). The left and right mouse buttons perform different tasks depending on the game being played, but usually they are primary and secondary weapon fire. The baseline mechanisms of the mouse operate as an isotonic zero-order input device. The mouse is also operated on a solid surface, with its movement controlled not only by the hand, but also in tandem with the wrist, forearm, and shoulder displacement. The combination of multiple joint movements is conducive with increased accuracy and comfort ratings due to our ability to combine small movements in each of these joints for coarse and fine movements during tasks. There is usually very little in terms of tactile indication of task completion during the normal operation of a mouse and a keyboard in gaming systems. However, there are force elements that can affect performance, as are present here in our mouse and mechanical keyboard.

With the mouse, the surface of operation (a wood-veneer desktop in our study here) may cause a noticeable drag upon the smoothness of movement. For the Logitech G303, the glide dynamic coefficient of friction =  $0.11 \mu(k)$  and the static coefficient of friction =  $0.17 \mu(s)$ . In addition, the weight of the mouse is also considered as an important design feature. For the Logitech G303, the mouse-only weight = 87 g, and the mouse plus cable = 127 g. The Logitech mouse and Corsair K60 keyboard also have buttons that display distinct



FIGURE 7.2 Mouse, Steam controller, PlayStation, DualShock 4, and Touchpad concept controller.

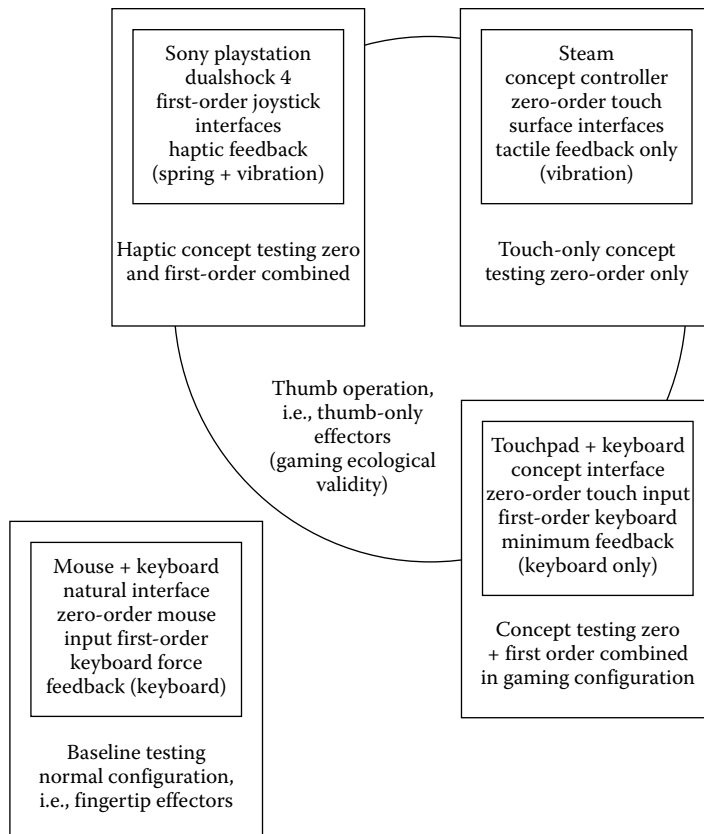


FIGURE 7.3 Summary of controller elements.

“key force” elements. These combine both force and tactile cues to indicate that a button has been pressed or clicked and an activation point has been reached. The forces required to cause a button to travel can be seen in force graphs, which indicate the point of key activation and return. Keyboards with mechanical elements apply springs and dampers to provide users with additional tactile information through clicks or bumps to indicate their activation point. The Logitech G303 mouse contains a metal spring button-tensioning system that keeps the left and right buttons precisely positioned, reducing pretravel, backlash, and delivering optimal response and feel, ensuring that in-game actions remain fast and accurate. The Corsair K60 contains Cherry MX red switches that require only 45 g of force to actuate. The mouse and keyboard are now regarded as the most familiar of all UIs in HCI, with most of all PCs requiring at least one of these interfaces for operation. This increase in familiarity affects the user’s ability to complete tasks as they are already acquainted with the device and its operation style.

#### Logitech Touchpad T650 and Logitech Ultrathin Keyboard

The Logitech Touchpad T650 is a smooth flat glass surface that is touch sensitive. It is multiplatform, including gesture recognition for OSX and Windows 8. It is proficient in terms

of precision, comparable to that of most mice, according to Logitech, but is isometric rather than isotonic. It is also customizable within the Logitech SetPoint software. Practical decisions were made to change the normal operational parameters of the device. The Touchpad was arranged and presented to the user as a thumb-operated input device for cursor movements, as opposed to the index finger; it was also to be held in the subject's hands rather than placed on a flat surface. These changes were made to maintain ecological continuity in gesture input styles between the other console-based game controller devices.

The Touchpad and keyboard-combined interface was the first of our concept controller types. It combined an isometric touch surface with a zero-order control process and a first-order keyboard device for Z-plane manipulation. The Cartesian plane was manipulated via thumb motions over the Touchpad surface. The surface itself was sensitive to input across its 134 mm × 129-mm area and has a weight = 210 g. The Touchpad also integrates a “dead zone” that allows the user to rest their finger upon its glass surface without moving the cursor. Because the surface is smooth, the Touchpad relays very little tactile information to the user via the thumb. Users were encouraged to use the tap function for selecting a target. However, it was also possible to “click” the device by pressing down anywhere on its surface. The accompanying Ultrathin keyboard was selected for its slim design (weight = 355 g) and a relatively light button force functionality. For users to locate the WASD keys without looking away from the screen, small rubber domes were applied to tactilely indicate thumb location upon the keyboard. Underneath the keyboard, we added an additional right-click and spacebar button for ease of use during multiparametric operations.

### Steam Controller

The Steam controller is the second of the concept controllers tested. This controller is a prototype input device from Valve (Valve Corporation, 2014). The controller incorporates a combination of interfaces that are gesture sensitive and clickable. The most distinctive difference between this device and the traditional controller is the introduction of circular Touchpads instead of joysticks. Steam is attempting to bridge PC and console genres by increasing the fidelity of thumb-based movements to that of those achieved by a mouse in zero-order control input situations. The thumb-operated touch surfaces are 40 mm in diameter, concave, and contain two circular tactile cues for thumb localization. As the input mechanisms on the Steam controller are that of an isometric zero-order control device, Valve has compensated for the reduced force feedback by adding expansive tactile feedback. In addition to the tactile ring indicators displayed on the touch surfaces, the controller is capable of delivering vibrations to the user's Palmer regions. In fact, Valve boasts superior tactile feedback, achieved via dual linear-resonant actuators, the inclusion of which is in response to the reduced kinaesthetic elastic feedback afforded to traditional controllers through spring-loaded thumbsticks. The controller is also configurable, and profiles can be created and edited to support the vast back catalog of games available from Steam. In the configuration menu, it is possible to adjust many parameters of the device. This includes the size of the dead zones in the center of the thumb pads.

## Sony DualShock 4

The proliferation of console gaming has led to the familiar form factors and designs used by the Microsoft Xbox and Sony PlayStation (Microsoft, 2014; Sony, 2014). In particular, these console game controller shapes and interface types have become the most recognizable of all game interfaces. These controllers incorporate a combination of joysticks with button and trigger input mechanisms. In the most recent Sony PlayStation controller, the design and construction elements of the gamepad have changed. The concave analog sticks have been upgraded, along with the introduction of a new Touchpad surface between the thumbsticks, with additional accelerometer and gyroscope motion controls. The overall robustness of the PS4 controller has also been improved upon in comparison to previous generations, while maintaining a total weight of 210 g. The DualShock 4 operates as a first-order elastic interface that maintains a spring force upon the thumb during operation. The spring force is directional and relates back to the central return position of the stick at rest. The movement of the thumbstick during operation follows a convex shape. In addition to this force feedback, the DualShock 4 is capable of stimulating the user's tactile system through controlled vibrotactile feedback. The spring and vibrational elements of these gamepads deliver a unique and somewhat controllable haptic feedback to the user.

## CASE STUDY 1: FUNCTIONALITY TESTING OF VIDEO GAME CONTROLLERS

The aim of our first experiment was to investigate the targeting performance of the chosen game controllers and compare the functionality, usability, and user experience data that were collected and highlighted to the various controller input configurations. The accuracy of the controllers was measured using a two-dimensional (2D) Fitts' Law assessment and the pointing experience-dependent measures were calculated using validated scales for posttask testing.

### Participants

Participants in experiment one (Group A) consisted of 10 males and 2 females. The participants in Group A were aged 22–41 ( $M = 28.42$ ;  $SD = 7.08$ ). All participants in this group had daily experience of using a mouse as a pointing device. Only 50% of participants used a Touchpad every day; 42% once a week; and 8% once a month. 98% of the participants considered themselves as gamers: who play at least every day or once a week (36% respectively); several times a month (18%); and once a month (8%). The preferred platform for gaming was PC gaming (65%), followed by mobile platforms (27%), and finally consoles (8%).

### Experimental Procedure

In the first stage of the experiment, participants were asked to target and click on circular objects as they were presented on-screen. To quantify the pointing task evaluations, we used the University of Oregon's WinFitts 2D Fitts' experiment tool (Willson, 2001). This program has been successfully applied to a number of previous experiments that adhere to the ISO 9241 Pointing Device standard [16, 30]. This targeting software is designed for

TABLE 7.1 Experiment Design

Target distance (mm)	40	80	140					
Target diameter (mm)	4	8	16					
Target angle (deg)	0	45	90	135	180	225	270	315

measuring discrete pointing tasks with total time-only measurements, as calibrated in Table 7.1. For all except the mouse, participants were asked to use their right-hand thumb to manipulate the X-Y targeting cursor. Each trial presented all combinations of targeting and selecting ( $3 \times 2 \times \delta$ ) as can be seen in Table 7.1, with the home square being randomly located on the screen at each step. The experiment consisted of one trial per block, with four blocks in total carried out for each controller. With the preset variables, the modified Shannon formulation was used to calculate the IDe for each block of the experiment (Equations 7.4 and 7.5). Participants were asked to complete a short posttask questionnaire to evaluate the different design aspects of the controller. More open-ended questioning and an informal verbal discussion of their experiences followed this.

RESULTS AND DISCUSSION

The data collected from the WinFitts program and user questioning were used to quantify the functionality of the devices in terms of TP, move time (MT), and errors made. We then performed linear regressions to validate these findings. Participants completed a usability questionnaire to gather posttask usability data. These questions were based on the ISO 9241-9 document mentioned earlier. Finally, users were asked to describe their experience, which was done in two ways. First, users were asked posttask to report on their experiences with each controller type. Second, post experiment verbal questioning was used to elicit more specific user experiences with each of the controller types.

Pointing Task Results

Throughput

User activity with the controller is assessed using a measure of TP in bits per second (bps). For the four devices, we calculated and compared the respective TP rates over the ID derived from the test parameters defined earlier (see Equation 7.3). As expected, the TP rate of the mouse considerably outperformed the other devices as a pointing tool. The mean TP of the devices per IDe value is listed in Table 7.2.

These statistics are illustrated as boxplots in Figure 7.4. As was mentioned earlier, the inclusion of the mouse as a pointing device was to serve as a baseline for comparison. The

TABLE 7.2 Throughput

Device	Number of IDe	Mean (bps)	Standard Deviation (bps)
Mouse	9	3.99	0.21
Touchpad	9	2.27	0.28
Steam controller	9	2.2	0.1
DualShock4	9	1.92	0.12

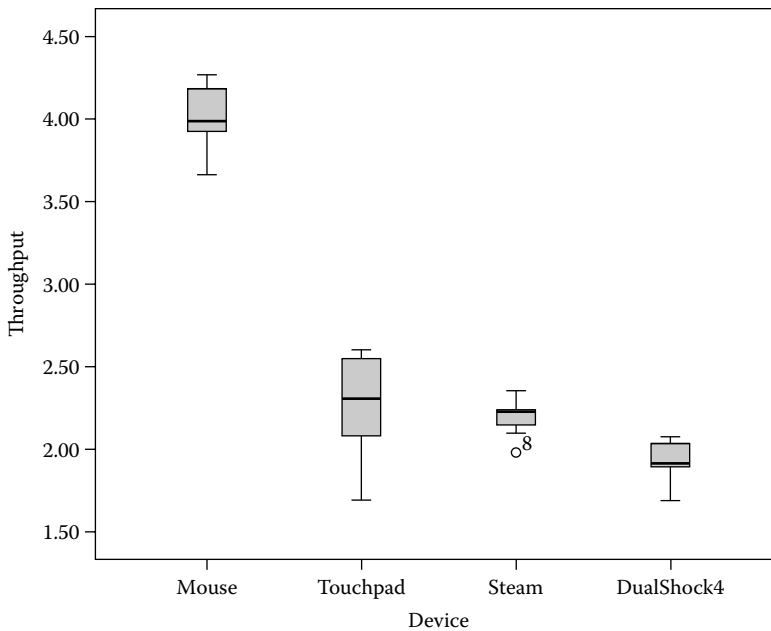


FIGURE 7.4 TP (bps) of each device with outliers marked as circles.

other controllers were evaluated as handheld input devices that did not require a desktop to support them, differentiating them from the mouse in physical operation.

In terms of TP, the other devices performed poorly in comparison to the mouse. The second highest TP was acquired with the Touchpad, with an average TP of 2.27 bps, 43% less bps than the mouse. The Steam controller, with a mean TP of 2.2 bps, 45%, followed this closely less than the mouse and 3% lower than the Touchpad. Finally, the DualShock 4 controller had an average TP of 1.92 bps, 52% lower than the mouse, 15% lower than the Touchpad, and 12% lower than the Steam controller. The reduced TP rate over the IDE range for each of the input devices increased users' dissatisfaction with the device for pointing tasks, as discussed later. This can be seen in the overall user assessment of each controller in [Figure 7.8](#).

A one-way analysis of variance was conducted to explore the impact of input device on TP, as identified in the Fitts' test. There was an overall statistically significant difference at the  $p < 0.05$  level in TP between the four controllers:  $F(3, 32) = 191.47$ ,  $p < 0.000$ . The overall effect size was as large as 0.92, calculated using eta squared. Post hoc comparisons using the Tukey HSD (honest significant difference) test indicated that the mean TP for the mouse was significantly different from the Touchpad, Steam, and DualShock 4 controllers (see [Table 7.3](#)). In addition, significant mean differences at the  $p < 0.05$  level were noted between the DualShock 4 and the mouse, Touchpad, and Steam controller. Despite reaching an overall statistical difference, post hoc testing has highlighted the small size of the actual differences in mean scores between Touchpad and Steam controllers and hence they were not deemed statistically significant ( $p = 0.85$ ).



TABLE 7.3 Post Hoc Tests for TP

Tukey HSD Multiple Comparisons					95% Confidence Interval	
(I) Devices	(J) Devices	Mean Difference (I-J)	Standard Error	Significance	Lower Bound	Upper Bound
Mouse	Touchpad	1.71*	0.096	0.00	1.45	1.97
	Steam	1.79*	0.096	0.00	1.53	2.05
	DualShock 4	2.06*	0.096	0.00	1.8	2.33
Touchpad	Mouse	-1.71*	0.096	0.00	-1.97	-1.45
	Steam	0.08	0.096	0.85	-0.18	0.34
	DualShock 4	0.35*	0.096	0.00	0.09	0.61
Steam	Mouse	-1.79*	0.096	0.00	-2.05	-1.53
	Touchpad	-0.08	0.096	0.85	-0.34	0.18
	DualShock 4	0.27*	0.096	0.00	0.01	0.53
DualShock 4	Mouse	-2.06*	0.096	0.00	-2.33	-1.8
	Touchpad	-0.35*	0.096	0.05	-0.61	-0.09
	Steam	-0.27*	0.096	0.04	-0.53	-0.01

\* The mean difference is significant at the 0.05 level.

Move Time

The mean MT for each device also followed a similar pattern as seen in the TP results (see [Figures 7.5 and 7.6](#)). The mouse outperformed all devices with a mean MT of 954.25 ms across the IDe variables outlined earlier. The Touchpad device followed with an average MT of 1625.65 ms, 70% slower than the mouse. The Steam controller was next,

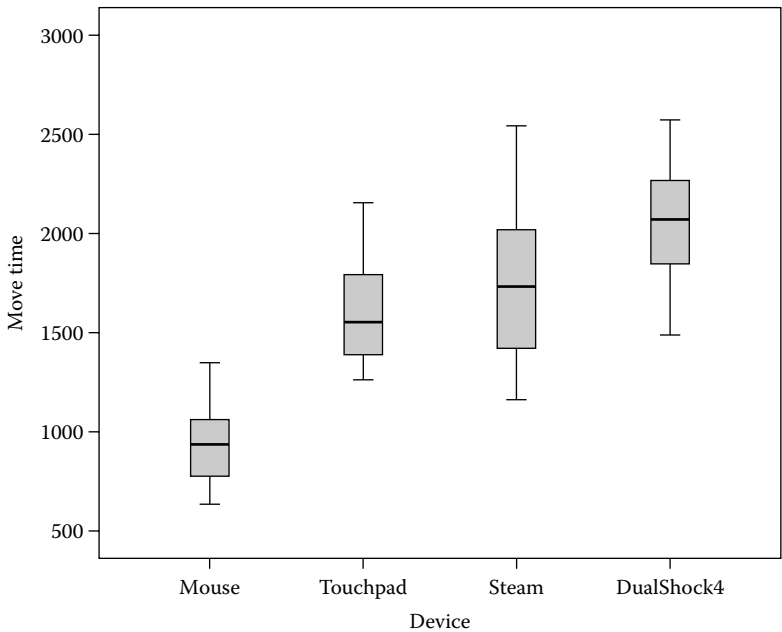


FIGURE 7.5 MT boxplots for each device.

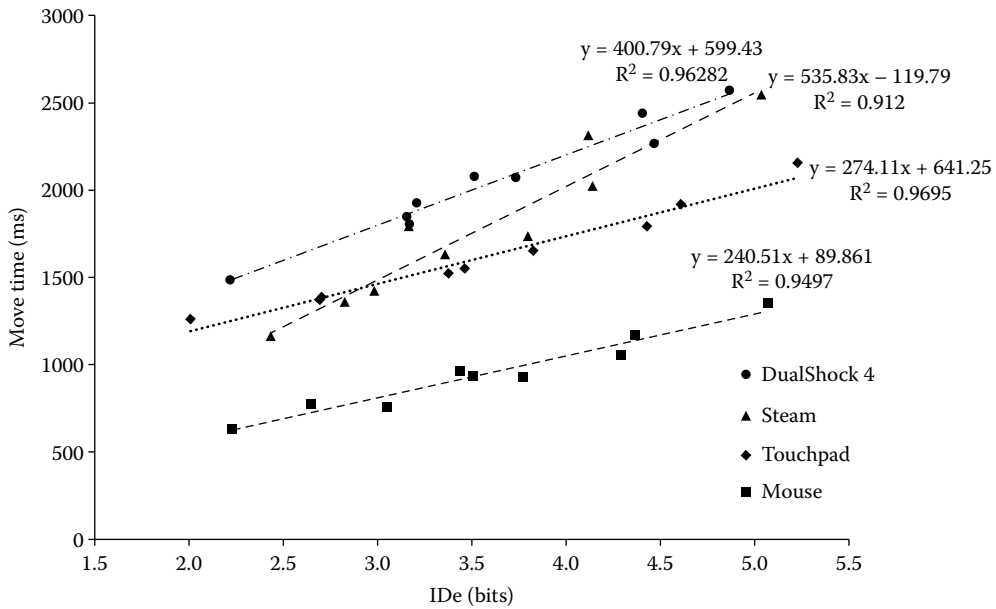


FIGURE 7.6 MT (ms) of all devices by ID (bits).

with an average MT of 1776.09 ms, 86% slower than the mouse and 9% slower than the Touchpad. Finally, the DualShock 4 controller presented an average MT of 2056.52 ms, 116% slower than the mouse, and 27% slower than the Touchpad and 16% slower than the Steam controller. A one-way analysis of variance was carried out to explore the impact of the controller type on MT. A statistically significant difference ( $p < 0.05$ ) was found in MT scores for the four controllers:  $F(3, 32) = 17.51$ ,  $p < 0.000$ . The overall effect size, calculated using eta squared, was 0.62. Post hoc comparisons using the Tukey HSD test indicated that the mean MT score for the mouse ( $M = 954.25$ ,  $SD = 220.41$ ) was significantly different from the Touchpad ( $M = 1625.65$ ,  $SD = 288.96$ , and  $p = 0.001$ ), the Steam controller ( $M = 1776.09$ ,  $SD = 452.6$ , and  $p < 0.000$ ), and the DualShock 4 ( $M = 2056.52$ ,  $SD = 336.78$ , and  $p < 0.000$ ) (see Table 7.4). The difference in mean MT scores between Touchpad and DualShock 4 controllers were also significant ( $p = 0.048$ ). The difference in mean MT scores between Steam and DualShock 4 controllers were insignificant ( $p = 0.305$ ).

### Errors

The TP and MT measurements from the Fitts' test provided a good measure of the accuracy and time taken by the participants to complete pointing tasks with each controller. However, they do not clearly indicate the success rate of the tasks alone. To accurately evaluate the controllers, the number of errors was measured per ID value and processed using the Shannon formulation. As was seen in the TP and the MT analysis, the mouse outperformed the other devices with the least amount of errors (6%), followed by the Touchpad (8%), then the Steam controller (9%), and finally the DualShock 4 (10%).

TABLE 7.4 Post Hoc Tests for MT

Tukey HSD Multiple Comparisons					95% Confidence Interval	
(I) Devices	(J) Devices	Mean		Significance	Lower Bound	Upper Bound
		Difference (I-J)	Standard Error			
Mouse	Touchpad	-671.4*	158.18	0.001	-1099.95	-242.84
	Steam	-821.84*	158.18	0.000	-1250.39	-393.29
	DualShock 4	-1102.28*	158.18	0.000	-1530.83	-673.72
Touchpad	Mouse	671.4*	158.18	0.01	242.84	1099.95
	Steam	-150.44	158.18	0.778	-578.99	278.11
	DualShock 4	-430.88*	158.18	0.048	-859.43	-2.32
Steam	Mouse	821.84*	158.18	0.00	393.29	1250.39
	Touchpad	150.44	158.18	0.778	-278.11	578.99
	DualShock 4	-280.44	158.18	0.305	-708.99	148.12
DualShock 4	Mouse	1102.28*	158.18	0.000	673.72	1530.83
	Touchpad	430.88*	158.18	0.048	2.32	859.43
	Steam	280.44	158.18	0.305	-148.12	708.99

\* The mean difference is significant at the 0.05 level.

### Linear Regression

In addition to the above analyses, we performed a least-squares linear regression to find the intercept and the slope parameters of Equation 7.2. This test highlighted the linear relationship between MT and ID, and validated our results as highly correlated ( $R^2$ ). For all positive intercept values, we maintained regression values under 400 ms. Negative intercept values did occur, but did not exceed -200 ms. These measurements for each IDe are shown in Tables 7.5 through 7.8.

### Usability: Pointing

As well as quantifying the pointing efficiency of the four devices, we also asked users to complete a questionnaire to evaluate usability and user experiences with these controllers for pointing tasks. Almost all participants expressed dissatisfaction with the DualShock 4 as a pointing device, causing some participants to feel that the task was too difficult to complete. Kruskal-Wallis testing revealed some statistically significant differences in question responses across the four different controllers. Four specific usability areas were

TABLE 7.5 Mouse-Pointing Results Including MT Linear Regressions ( $y-\hat{y}$ )

Mouse									
IDe	2.23	3.05	2.64	3.50	3.44	3.77	4.29	4.37	5.07
TP	3.67	4.23	3.66	3.99	3.95	4.27	4.18	3.93	3.99
MT	634.81	763.32	775.71	936.31	962.97	927.22	1062.60	1175.52	1349.77
Error rate	0.02	0.02	0.04	0.04	0.07	0.04	0.07	0.08	0.11
$y = 240.51 \times +89.861$	625.29	823.13	725.79	932.22	916.14	995.67	1121.83	1140.21	1308.06
$y-\hat{y}$	15.69	-12.36	8.61	4.23	-58.76	15.78	26.80		
RSQ	0.95								

TABLE 7.6 Touchpad-Pointing Results Including MT Linear Regressions ( $y-\hat{y}$ )

<b>Touchpad</b>									
IDe	2.01	2.71	2.69	3.38	3.82	3.46	4.43	4.60	5.23
TP	1.69	2.00	2.08	2.31	2.31	2.33	2.60	2.55	2.57
MT	1262.36	1390.77	1370.22	1525.92	1653.85	1553.24	1793.90	1923.03	2157.51
Error rate	0.04	0.05	0.06	0.06	0.04	0.07	0.04	0.03	0.05
$y = 274.11 \times +641.25$	573.09	740.47	736.64	901.92	1009.43	922.10	1154.52	1197.16	1347.10
$y-\hat{y}$	70.38	8.01	-8.16	-40.83	-35.44	-36.51	-60.75	19.79	83.38
RSQ	0.97								

TABLE 7.7 Steam-Pointing Results Including MT Linear Regressions ( $y-\hat{y}$ )

<b>Steam</b>									
IDe (bps)	2.43	2.98	2.83	3.36	3.16	3.80	4.14	4.12	5.03
MT (ms)	1162.07	1422.92	1360.49	1632.76	1790.28	1734.99	2020.82	2315.77	2544.69
Error rate (%)	0.01	0.03	0.05	0.04	0.11	0.03	0.07	0.11	0.10
TP (bits)	2.26	2.15	2.23	2.24	2.10	2.36	2.21	1.98	2.24
$y = 535.83x - 119.79$	674.91	807.07	769.44	897.08	850.95	1002.86	1084.82	1080.20	1300.20
$y-\hat{y}$	-21.57	-55.16	-33.76	-45.86	214.44	-179.29	-76.05	229.20	-32.02
RSQ	0.91								

TABLE 7.8 DualShock 4-Pointing Results Including MT Linear Regressions ( $y-\hat{y}$ )

<b>DualShock 4</b>									
IDe (bps)	2.22	3.15	3.17	3.73	3.21	3.51	4.47	4.40	4.86
MT (ms)	1487.64	1847.29	1807.30	2072.43	1929.84	2079.97	2268.27	2442.71	2573.26
Error rate (%)	0.02	0.03	0.04	0.03	0.17	0.04	0.04	0.09	0.15
TP (bits)	1.79	1.92	2.03	2.08	1.69	1.89	2.05	1.90	1.95
$y = 535.83x - 119.79$	624.00	848.26	852.10	987.25	860.98	934.18	1164.02	1148.41	1259.00
$y-\hat{y}$	-1.89	-15.95	-62.34	-22.42	45.40	73.55	-121.16	79.29	25.56
RSQ	0.96								

identified, including smoothness of operation, mental effort exerted during the task, the accuracy of the device in pointing, and the speed of the cursor movement. The overall evaluation of the individual devices showed statistical significance in the answers given for each of the four controllers. A diverging stacked bar chart comparison between these devices for each of the questions can be seen in [Figure 7.7](#). The significance of these differences shall also be discussed ([Table 7.9](#)).

### *Smoothness of Operation*

First, significant differences in the users' evaluation of smoothness of operation were measured. The mouse was deemed the smoothest of the four controllers with 67% of users agreeing that it was *fairly* smooth or *too* smooth in its operation. The overall user perception of smoothness decreased from here for the individual controllers. 50% of users found

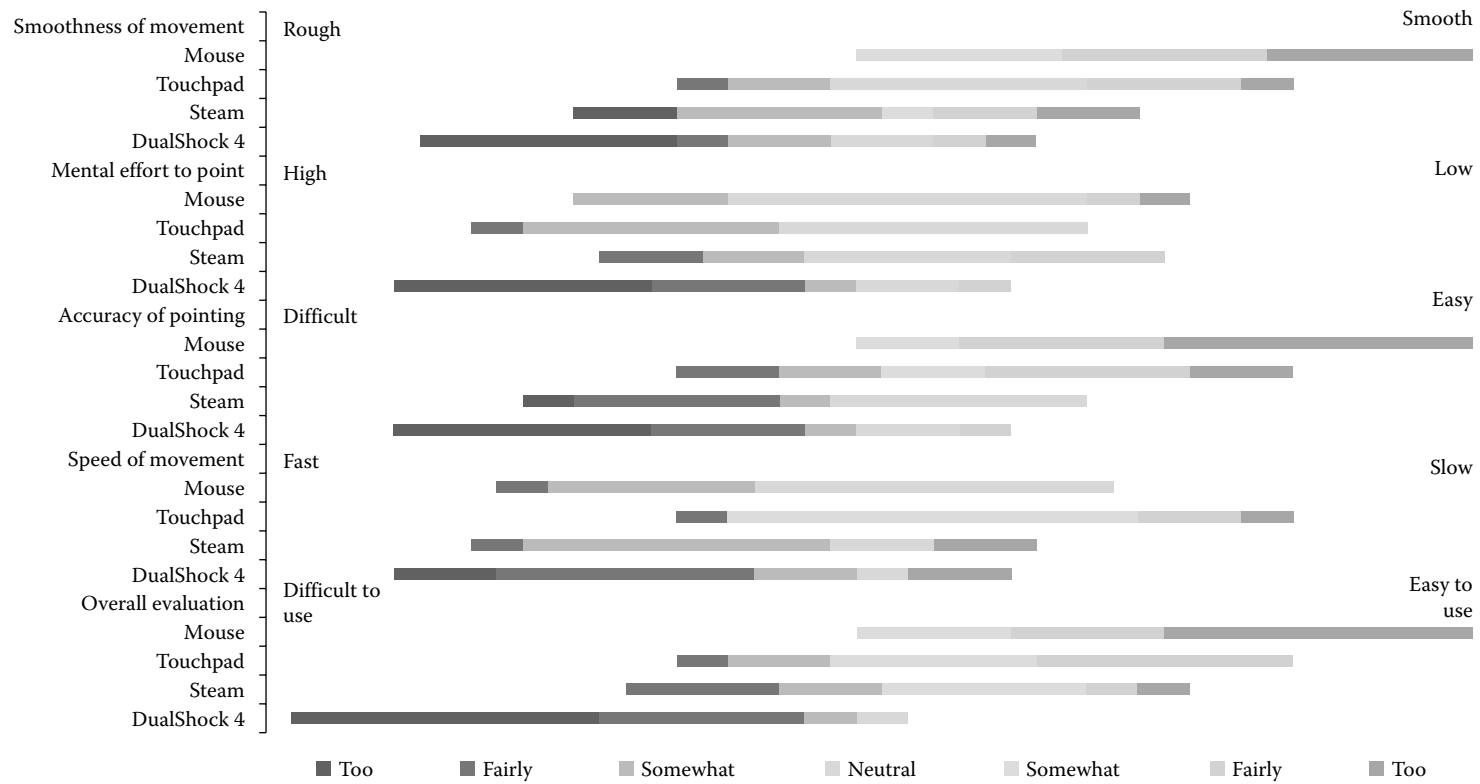


FIGURE 7.7 Statistically significant user ratings from pointing data.

TABLE 7.9 Significant Chi-Squared Results from Pointing Usability Data

Question	Device	<i>Md</i>	$\chi^2$ for (3, <i>n</i> = 47)	<i>p</i>
Smoothness	Mouse ( <i>n</i> = 12)	6	13.02	0.05
	Touchpad ( <i>n</i> = 12)	5		
	Steam ( <i>n</i> = 11)	3		
	DualShock 4 ( <i>n</i> = 12)	2.5		
Mental effort	Mouse ( <i>n</i> = 12)	4	9.82	0.000
	Touchpad ( <i>n</i> = 12)	3.5		
	Steam ( <i>n</i> = 11)	4		
	DualShock 4 ( <i>n</i> = 12)	2		
Accuracy	Mouse ( <i>n</i> = 12)	6.5	32.84	0.000
	Touchpad ( <i>n</i> = 12)	5.5		
	Steam ( <i>n</i> = 11)	3		
	DualShock 4 ( <i>n</i> = 12)	1		
Speed	Mouse ( <i>n</i> = 12)	4	9.45	0.025
	Touchpad ( <i>n</i> = 12)	4		
	Steam ( <i>n</i> = 11)	4		
	DualShock 4 ( <i>n</i> = 12)	2		
Overall	Mouse ( <i>n</i> = 12)	6.5	28.06	0.000
	Touchpad ( <i>n</i> = 12)	5		
	Steam ( <i>n</i> = 11)	5		
	DualShock 4 ( <i>n</i> = 12)	1.5		

that the Touchpad was *somewhat* smooth or *fairly* smooth. User perception of smoothness for the Steam controller was evaluated as *fairly* smooth or *too* smooth by 33% of users. Interestingly, 17% of users thought the movement of the Steam controller was *too* rough. Finally, the DualShock 4 was considered *too* rough or *fairly* rough by 50% of users.

#### *Mental Effort Exerted during the Task*

Then, significant differences in the users' evaluation of the mental effort required to point were measured. The mouse received a relatively *neutral* overall rating of 50% for mental effort in operation. The Touchpad received a similar rating, but it was weighted more toward a *somewhat* high rating of mental effort. The Steam controller was more evenly split across the *neutral* or *somewhat* rating of mental effort, with 50% of its user ratings. However, the DualShock 4 received 67% of reports highlighting it as requiring *too* high or *fairly* high amounts of mental effort for pointing tasks.

#### *Accuracy of the Device in Pointing*

Next, the significant differences in the users' evaluation of the difficulty in accurately pointing with each of the four controllers were calculated. As with the evaluation of smoothness, the mouse was deemed the easiest of the four controllers for pointing, with 88% of users regarding it as *fairly* easy or *too* easy. The overall user perception of difficulty increased from here respectively for the different controllers. The Touchpad was seen to be *fairly* easy or *too* easy to use by 50% of users. The Steam controller was measured as being *somewhat* difficult or *fairly* difficult by 42% of users. Finally, the DualShock 4 was judged as being *too* difficult for pointing tasks by 83% of users.

### *Speed of the Cursor Movement*

The majority of users evaluated the mouse and Touchpad relatively *neutral* for speed, 42% and 50%, respectively. The Steam controller was deemed to be *somewhat* fast by 50% of participants, but notably, 17% found it *too* slow. The DualShock was evaluated as being either *fairly* fast or *too* fast (59%) by the majority of users; however, some users thought it was *too* slow (17%). The users whose evaluations were deemed *too* slow were further questioned on their answers and they indicated that the process of selecting the target was *too* slow overall, not the actual speed of the task. This may highlight a flaw in the wording of this question in the literature.

### *Overall Evaluation*

Finally, significant differences in the user's overall evaluation of the four controllers at pointing tasks were computed. The final question was a single ease question (SEQ), which was used to establish the user's overall rating of the controller's ease of use. Users clearly preferred the mouse over the other three devices, with 75% of users rating it as *fairly* or *too* easy to use. With respect to the Touchpad and the Steam controller, users indicated a verbal preference for the Steam controller due to their familiarity with similar controller interfaces. When further questioned, users were uncertain of the thumb-based operating style of the Touchpad. This may be attributed to the transparency of these devices in comparison to conventional pointing interfaces—the Touchpad is never operated with a thumb and is very rarely used in gaming. 42% of participants judged the Touchpad as being fairly easy to use and 25% thought it was fairly or somewhat difficult to use. The DualShock 4 was deemed the most difficult to use for pointing tasks, with 88% of users gauging it as *fairly* to *too* difficult to use.

### User Experience: Pointing

Participants were asked to evaluate each controller as a pointing device via open-ended questioning (see [Figures 7.8, 7.9](#), and [Appendices](#)). The general feedback of the devices followed the trends highlighted above, with the users' order of preference being closely related to each of the device's overall pointing performance. The mouse was evaluated most favorably, with a few users indicating that they would prefer a customizable position resolution (in dots per inch, DPI) for pointing tasks as the cursor sensitivity was too high for them. They also complained that the left-click mechanism was too light and caused them to click unintentionally. The second most-favored device was the Touchpad. Multiple users raised the issue of not being able to accurately move the cursor in one movement, resulting in them having to raise their thumb off the touch surface, place it back down, and sweep toward the target again ("lift-off"). The cursor would either fall short of the target in one thumb sweep or it would overshoot. Users also stated that they were unable to accurately select with the tap-to-click function; this is due to the Touchpad moving the cursor when operated. This movement could be indicative of the "dead-zone" being too small for thumb operation. Similar comments were made about the Steam controller. Selecting small targets with micromovements proved to be difficult for users due to the sensitivity of the Steam controller's touch sensor. In addition, some users expressed



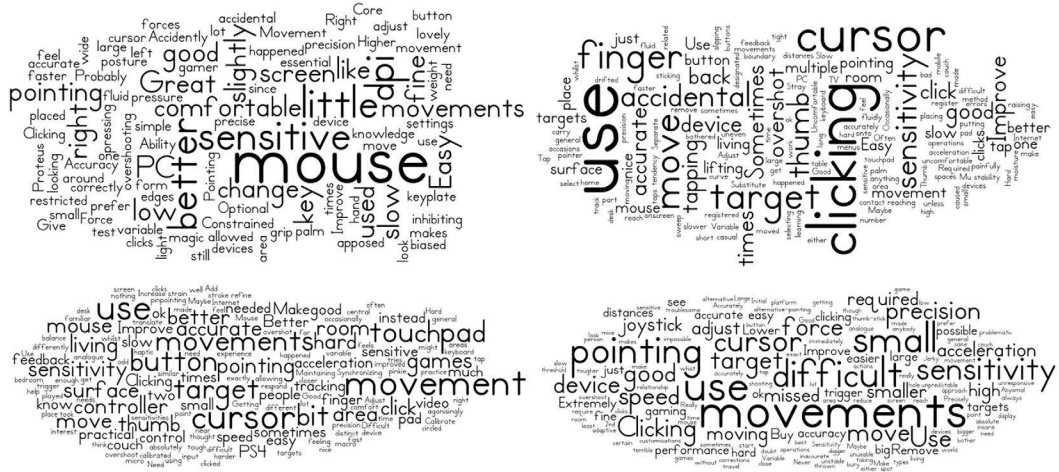


FIGURE 7.8 Tag cloud from questioning for experiment one (left–right; mouse, Touchpad, Steam, and DualShock 4).

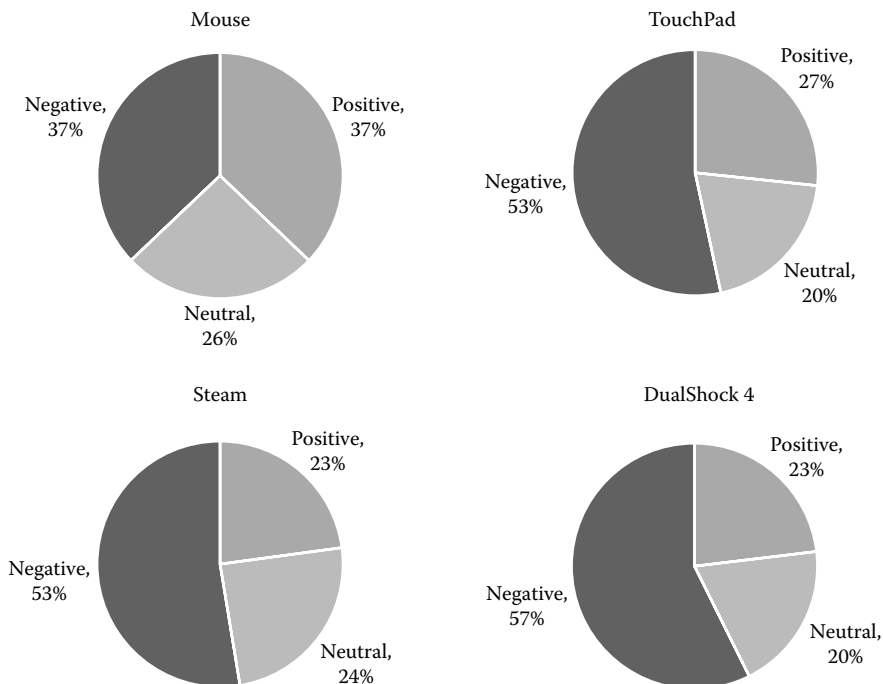


FIGURE 7.9 Analysis of feedback content for pointing tasks.

dissatisfaction with the click mechanism. Finally, the DualShock 4 controller had the greatest user dissatisfaction in pointing tasks. Users found that the sensitivity was unpredictable and unsuitable for small movements. Large or macromovements were easy, but smaller, microadjustments were deemed impossible for some users. Some users were so frustrated with the pointing performance of this controller that they were reluctant to

continue the experiment after only two blocks. However, all users rated the click-to-select trigger most favorably.

Further analysis of the feedback questionnaire revealed the following information about how the users experienced pointing with these devices. As can be seen in [Figure 7.9](#), the mouse was the most positively rated for pointing tasks, followed by the Touchpad, with both the Steam and DualShock 4 controllers receiving the same percentage of positive remarks. The DualShock 4 received the highest number of negative comments, jointly followed by the Touchpad and Steam controller, with the mouse receiving the least number of negative comments. Positive and negative remarks toward the devices were reflective of the user ratings mentioned above.

## CASE STUDY 2: IN-GAME TESTING OF VIDEO GAME CONTROLLERS

For the second stage of the experiment, participants were asked to use the same controllers in an FPS game. The game “Half Life 2” was used for this study. This game, developed by Valve Corporation, is an FPS with occasional puzzle-based tasks. The user’s in-game experiences and self-evaluation were captured at each controller stage via Likert-scale questioning and an open-ended questionnaire. Personal comments were also recorded by the researcher using informal note taking in-game and postgame. The aim of this study was to evaluate the altered in-game usability and user experiences that may have occurred due to the altered state of controller feedback.

### Participants

The second group of participants, randomly selected, was composed of seven males and five females. All participants were recruited in Cork (Ireland) and the surrounding community area. The participants in Group B were aged 13–43 ( $M = 26.18$ ;  $SD = 8.98$ ). 42% of participants played video games on a daily basis, 33% once a week, 17% once a month, and 8% played less regularly. The preferred platform for gaming was the PC (33%), followed by the PlayStation and other platforms (25% respectively), and finally the Xbox (17%). The preferred game controller was the mouse and keyboard (42%), followed by the PlayStation controller (25%), while 17% of the participants preferred the Xbox controller, and the same number of participants preferred other interfaces (such as gesture controllers and touchscreens). All participants in Group B were familiar with a range of different game genres, including MMO, FPS, RTS, RPG, sports, and others. There was also no decisive preference of the current favorite game.

### Experimental Procedure

The same procedures for posttask user evaluation of usability and experience of Case Study 1 were followed. This stage of the experiment was conducted on a separate date due to the extended time required for both the pointing task and the in-game experiment. Each test period consisted of a 10-min period of adjustment and exploration of key functions, followed by a 15-min block of game play for each controller type. Each of the four blocks of gameplay presented the user with a new controller type, allocated in a counterbalanced order.

## IN-GAME RESULTS

Here, we present the results of the study based on the game “Half Life 2.” Initially, in-game deaths were recorded to quantify controller functionality, but did not reveal significant differences due to random variations in gameplay stages, and controller functionality was not the focus of this particular study. The counterbalanced ordering of controllers, the individual gamer’s previous experiences, and their skill level required the measurement of complex factors such as simultaneous multiparametric control, timing, flow, and previous training. As in Case Study 1, a usability questionnaire was presented to participants to gather posttask usability data. Finally, users were asked to describe their experience after each controller stage using open-ended questioning.

### Usability In-Game

Kruskal–Wallis testing revealed some statistically significant differences in question responses across the four different controller stages. Specifically, questions about the forces required for moving and aiming, the accuracy of the controller for moving and aiming, and the overall user evaluation of respective controllers showed statistical significance in answers for each of the four devices. A diverging stacked bar chart comparison between these devices for each of the questions can be seen in [Figure 7.10](#) ([Table 7.10](#)).

#### *Evaluation of Physical Force Required for Moving*

Kruskal–Wallis testing revealed significant differences in the user’s evaluation of physical force required for moving the character and aiming the crosshair. The mouse, Touchpad, and DualShock 4 have shown, on average, to require a relatively neutral amount of force for character movement and aiming. However, the user evaluation of perceived force required for the Steam controller was measured as being fairly *low* or *too low* by 33% of users.

#### *Difficulty in Accurately Moving and Aiming*

The same test also revealed significant differences in the user’s evaluation of the difficulty in accurately moving and aiming with each of the four controllers. As with the evaluation of force, the mouse was found to be the most accurate of the four controllers for pointing, with 41% of users judging it to be *too easy* to use. The Touchpad followed this, with 50% of users evaluating it as *somewhat easy* to *fairly easy*. The DualShock 4 was evaluated as being *fairly hard* to use for aiming and moving the character by 42% of users. Finally, the Steam controller was assessed as being *too difficult* to use by 58% of users. The statistical importance of the overall user perception of accuracy in-game was particularly interesting as it was also found to have the same importance as in Case Study 1. However, in pointing tasks, the DualShock 4 was found to be significantly *more* difficult to move and aim accurately when compared to the Steam controller.

#### *Overall In-Game Evaluation*

Finally, the Kruskal–Wallis test revealed significant differences in the user’s overall in-game evaluation of the four controllers. Users clearly preferred the mouse to the other three devices, with 50% of users rating it as either *fairly easy* to use or *too easy* to use.

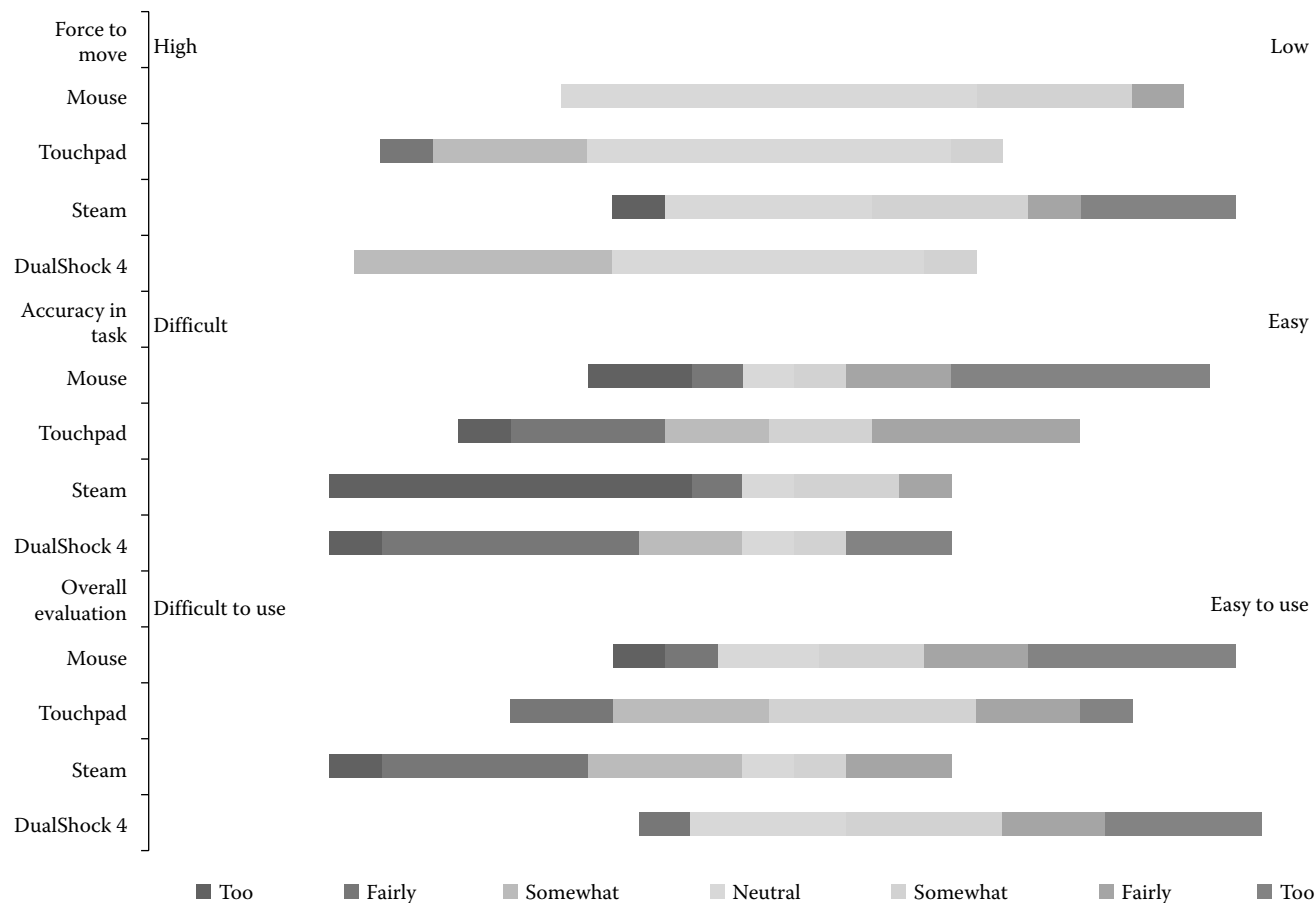


FIGURE 7.10 Statistically significant user ratings from in-game analysis.

TABLE 7.10 Significant Chi-Squared Results from In-Game Usability Data

Question	Device	<i>Md</i>	$\chi^2$ for (3, <i>n</i> = 48)	<i>p</i>
Force	Mouse ( <i>n</i> = 12)	4	12.35	0.006
	Touchpad ( <i>n</i> = 12)	4		
	Steam ( <i>n</i> = 11)	5		
	DualShock 4 ( <i>n</i> = 12)	4		
Accuracy	Mouse ( <i>n</i> = 12)	5.5	8.34	0.04
	Touchpad ( <i>n</i> = 12)	4		
	Steam ( <i>n</i> = 11)	1		
	DualShock 4 ( <i>n</i> = 12)	2.5		
Overall	Mouse ( <i>n</i> = 12)	5.5	9.7	0.02
	Touchpad ( <i>n</i> = 12)	5		
	Steam ( <i>n</i> = 11)	3		
	DualShock 4 ( <i>n</i> = 12)	5		

The Touchpad and DualShock 4 controller appeared to be subjected to individual user preference. The Likert scaling for the Touchpad was rated positively by 58% of users and the DualShock 4 received only 29% positive reviews. Moreover, further questioning highlighted the influence of an individual's previous experiences with game controllers. 17% of users rated the DualShock 4 *too* easy to use, as it was their existing controller, which may have biased them somewhat against the Touchpad. The Steam controller was deemed the most difficult to use in-game. 67% of users gave it a negative rating, with 33% of the total ratings deeming it *fairly* difficult to use. These results were also statistically significant in the user evaluation of controllers for pointing tasks. However, the user's ranking of the devices found the Steam controller more favorable than the DualShock 4.

#### User Experience: In-Game

Test participants were asked to evaluate each controller via open-ended questioning at the end of each in-game testing block. The general feedback for all devices presented notable similarities made apparent in the usability questioning above. In addition, some interesting deviations could also be seen with the user's evaluation of controllers in experiment one. The mouse was evaluated most positively, with users expressing that they found it easy to use for aiming the on-screen crosshair. Some users were unsure about the keyboard arrangement, but they felt that they could quickly adjust and adapt to the new control method. The second most-favored devices were the DualShock 4 and the Touchpad. Several users expressed that they were satisfied with both devices' capability to accurately move and aim the crosshair. Smooth movements were possible with the DualShock 4; however, users noted that they had to glide their right thumb over the Touchpad to look around quickly. In addition, users commented on the lack of ergonomic form in the design of the Touchpad and keyboard combination. These comments possibly represent the current prototype's shortcomings, but should be given greater consideration when further developing the device. Users also commented on the feedback mechanisms of the DualShock 4. The spring mechanisms in the thumbsticks provided users with force feedback information that assisted them in positioning the thumb within its operational area. Several users highlighted that they preferred to use this controller for their own gaming. Finally, the

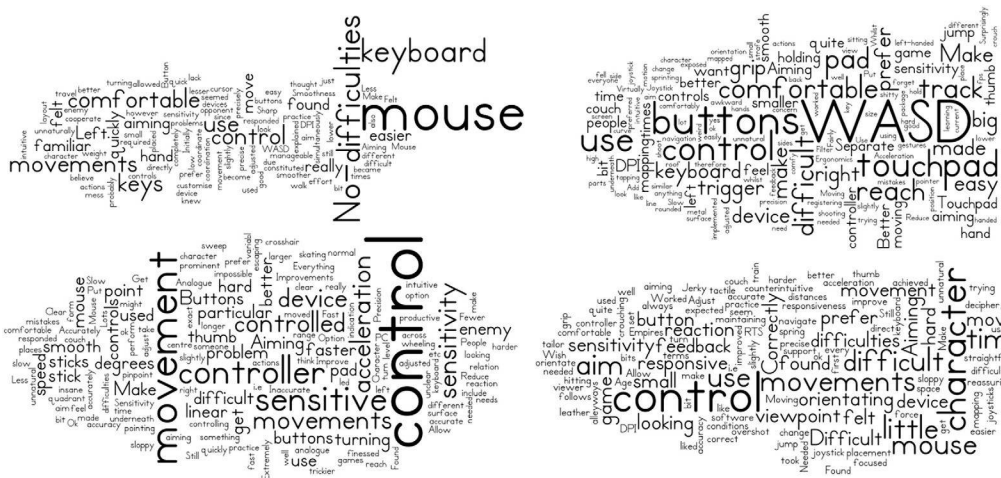


FIGURE 7.11 Tag cloud of open-ended questioning for experiment two (left to right; mouse, Touchpad, Steam, and DualShock 4).

Steam controller registered the greatest user dissatisfaction in in-game operation. Similar comments were made about the Steam controller involving gliding and lift-off. Users were not able to accurately move toward a target, often overshooting. The sensitivity was also commented upon as being too high. Users found that their movements were erratic and jarring for actions that required precision.

An analysis of the questionnaire feedback revealed the following data about how users experienced in-game scenarios with these devices. As can be seen in Figures 7.11, 7.12, and in the Appendices, the mouse was most favorably rated for in-game tasks, followed by the Touchpad, the DualShock 4, and finally the Steam controller. Both the DualShock 4 and the Touchpad received nearly the same percentage of positive remarks. The Steam controller received the highest number of negative comments, followed by the DualShock 4 controller, the Touchpad, and finally the mouse. Positive and negative remarks toward the devices were reflective of the user ratings mentioned above.

### DIFFERENCES BETWEEN POINTING AND IN-GAME ANALYSIS

Owing to the noticeable variation in controller evaluations, it was necessary to analyze and compare both sets of data from experiments one and two together. Functionality testing of pointing tasks is easily undertaken; however, these fail to show any meaningful data for the analysis of in-game scenarios. Also, the usability of game controllers for pointing was found to be problematic for game controllers, mainly due to the mixed zero-/first-order input strategies of each of the devices (Table 7.11).

#### Significant Variations in Usability Testing

Kruskal–Wallis testing was used to discover where variations between pointing and in-game usability testing occurred, as seen in Figure 7.13. For the mouse and Touchpad, no significant variations occurred between user evaluation ratings for each experiment.

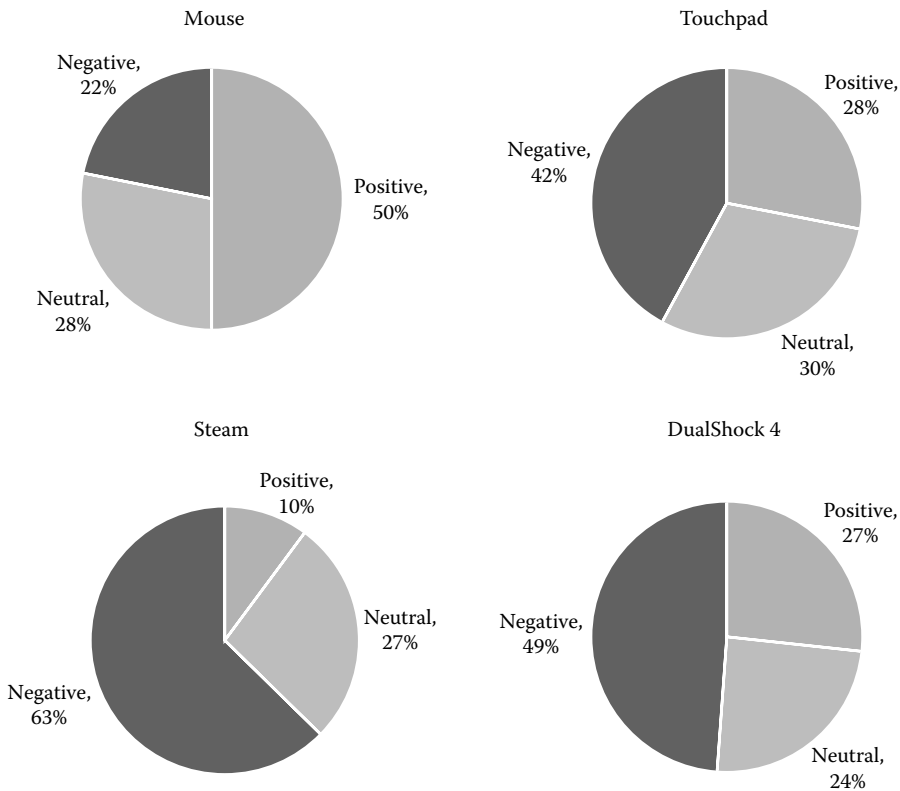


FIGURE 7.12 Analysis of feedback content for in-game tasks.

However, for the Steam controller, a significant variation was found between the user's evaluation of mental effort required for pointing and moving the character/aiming. For the DualShock 4, significant differences were noted between smoothness of operation, perceived accuracy of the device and the speed of operation, finger fatigue, and the overall evaluation of the controller for gaming.

TABLE 7.11 Significant Chi-Squared Variations between Pointing and In-Game Usability Testing

Question	Device	Experiment	<i>Md</i>	$\chi^2$ for (1, <i>n</i> = 23)	<i>p</i>
Mental effort	Steam	Pointing	4	6.18	0.013
		In-game	6		
Smoothness	DualShock 4	Pointing	2.5	8.34	0.03
		In-game	4.67		
Accuracy	DualShock 4	Pointing	7	11.99	0.01
		In-game	5.5		
Speed	DualShock 4	Pointing	2	5.64	0.02
		In-game	4.5		
Fatigue	DualShock 4	Pointing	4	4.98	0.03
		In-game	1		
Overall	DualShock 4	Pointing	1.5	15.23	0.000
		In-game	5		



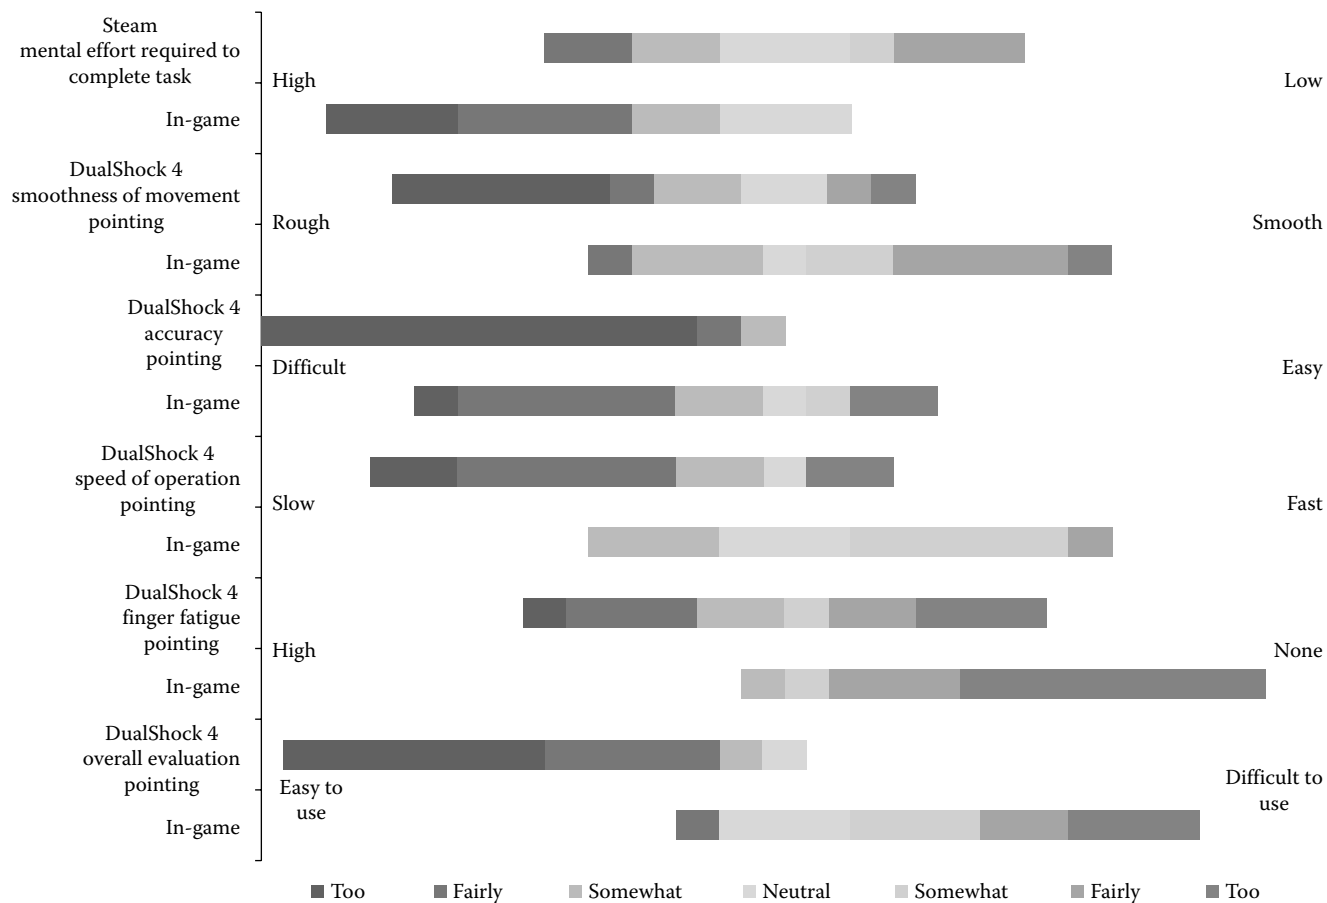


FIGURE 7.13 Significantly different evaluations for pointing task and in-game testing.

Given the changes in user evaluations, it was not unexpected that the overall evaluation of the DualShock 4 controller was significantly different in-game than for pointing tasks.

### Significant Variations in User Experience Testing

With respect to the user experience tests, participants were considerably less positive about the Steam controller in the user experience interviews. The Steam controller received a much higher percentage of negative comments and a significantly lower number of positive remarks in the in-game experience reviews compared to the pointing evaluation. Many of the participants were familiar with the DualShock 4 metaphor of game control; some even indicated early on that it was their preferred controller for gaming outside the experiment. However, when questioned about the difficulties that they were experiencing with the Steam controller, many of the participants expressed that they would likely become familiar with the controller if given more time. When evaluating the controllers, novice gamers said that they preferred the Steam device over the other game controllers tested; intermediate players preferred the DualShock 4; and advanced users preferred the mouse and keyboard. This trend may be reflective of the natural affordances of the thumbstick in a console/PC-gaming scenario.

## CONCLUSIONS

In this chapter, we have presented two case studies that compared the performance of game controllers in pointing tasks, and collected data pertaining to the usability and user experiences in in-game scenarios. Our main investigation was focused on console-based game controllers and their comparison to a traditional mouse and keyboard. In particular, we focused on a well-known game controller (Sony PlayStation DualShock 4) and two lesser-known models of a handheld game controller. Specifically, Valve's Steam controller and a prototype Touchpad were used to represent emergent controller-based methods of interaction. Our investigation first presented previous research and methodologies of game interaction that were relevant to our examination. We then conducted two experiments that sought to capture functionality, usability, and user experience data to evaluate each controller in tasks that were representative of FPS gaming. In many FPS games, there is "snap to target" assistance, with coarse and fine-grained targeting options. These were removed for the pointing tasks; however, they were retained for the in-game scenario tests.

Case Study 1 measured the subjective-pointing ability of our participants across the four controllers. It was found that the mouse was the most effective targeting device, followed by the Touchpad and Steam controller. The Steam controller and the Touchpad performed comparatively well. The DualShock 4 controller was found to be the least effective at targeting tasks and ranked very low in the usability and user experience data analysis for pointing functionality. The experiment provided a quantifiable measure of each controller's effectiveness when used to seek and select targets that varied in distance, angle, and size. The poor performance of the DualShock 4 may be attributed to the control system ordering of the joystick as a pointing device.

In Case Study 2, we continued our analysis of the same four controllers, but focused our attention to the usability and user experience within game play. We did not collect quantifiable data with this particular experiment, as it would have required a very complex experiment design to account for the numerous subject variables. Usability and user experience data were gathered to give quantitative and qualitative data results. Again, the mouse was rated the most favorable in testing, while the other controllers produced quite different and varied results in usability and user experiences. The DualShock 4 controller was assessed as being superior to both the Steam and Touchpad controllers. This may in part be attributed to the prevalence of console-based FPS games, where participants are already familiar with the control mechanisms used for targeting. Although the Steam and Touchpad were shown to function as superior targeting mechanisms, they were rated less preferable as in-game controllers.

To conclude, we compared the collected data from both experiments and found that these two case studies combined show how the amalgamation of qualitative and quantitative methods, both in and out of gameplay, can be used together to measure functionality, usability, and to better understand the users' overall experience. Specifically, we have shown that functionality testing alone is not sufficient when trying to establish a device's usability and its effects on user experience.

## CHALLENGES, SOLUTIONS, AND RECOMMENDATIONS

Limitations in our studies include the relatively short duration of the tests, and the focus being on the initial user experience of the devices. The first experiences of using a new controller can be a predictor of longer-term experience. That said, it is also possible that additional problems and/or opportunities may be revealed with extended use (Karapanos, 2008). As a result, longitudinal use, considering the impact of learning and adaptation over time, are especially important considerations in evaluating new controllers (Kujala et al., 2011).

Another limitation of the studies is the limited consideration of the impact of controller aesthetics. The study involved the use of one prototype device (Touchpad), which was evaluated against other established available controllers. The established controllers have the advantage of optimized ergonomics and refined aesthetics (colors, material textures). Researchers have demonstrated relationships between product usability and product aesthetics (Hassenzahl, 2004; Tractinsky et al., 2000).

The data collected in the studies consist of both data collected from the devices (with logging software), and data collected afterward as participants completed questionnaires. In future, it would be useful to complement this in-game data with biometric and video capture data (with emphasis on facial expressions and body movement). These data may complement the information collected postgame play in the questionnaires, and lead to a more complete understanding of the user experience.

## REFERENCES

- Birk, M. and R. L. Mandryk. Control your game-self: Effects of controller type on enjoyment, motivation, and personality in game. *CHI'13*, ACM, Paris, France, 2013: 685–694.

- Brown, M., A. Kehoe, J. Kirakowski, and I. Pitt. Beyond the gamepad: HCI and game controller design and evaluation. *Evaluating User Experience in Games*, Springer, London, 2010: 209–219.
- Cairns, P., J. Li, W. Wang, and A. Imran Nordin. The influence of controllers on immersion in mobile games. In *Proceedings of the 32nd Annual ACM Conference on Human Factors in Computing Systems*, ACM, Vienna, Austria, 2004: 371–380.
- DeNA Co., June 20, 2014. [www.thedrowning.com](http://www.thedrowning.com).
- Douglas, S. A., A. E. Kirkpatrick, and I. S. MacKenzie. Testing pointing device performance and user assessment with the ISO 9241, Part 9 standard. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, ACM, Pittsburgh, US, 1999: 215–222.
- Entertainment Software Association. *Essential Facts about the Computer and Video Game Industry*. June 20, 2014. [www.theesa.com/facts](http://www.theesa.com/facts).
- Entertainment Software Rating Board (ESRB). June 23, 2014. [www.esrb.org/about/video-game-industry-statistics.jsp](http://www.esrb.org/about/video-game-industry-statistics.jsp).
- Fitts, P. M. The information capacity of the human motor system in controlling the amplitude of movement. *Journal of Experimental Psychology*, 47, 1954: 381–391.
- Gerling, K. M., M. Klauser, and J. Niesenhaus. Measuring the impact of game controllers on player experience in FPS games. In *Proceedings of Academic MindTrek Conference: Envisioning Future Media Environments*, ACM, Tampere, Finland, 2011: 83–86.
- Hassenzahl, M. The interplay of beauty, goodness, and usability in interactive products. *Human-Computer Interaction*, 19.4, 2004: 319–349.
- id Software. *Wolfenstein 3D*. PC game, 1992.
- id Software. *Doom*. PC game, 1993.
- ISO, 9421-9. *Ergonomic Requirements for Office Work with Visual Display Terminals (VDTs)—Part 9: Requirements for Non-Keyboard Input Devices*, International Organisation for Standardisation, London, UK, 2000.
- Jennett, C., A. L. Cox, P. Cairns, S. Dhoparee, A. Epps, T. Tijs, and A. Walton. Measuring and defining the experience of immersion in games. *International Journal of Human-Computer Studies*, 66(9), 2008: 641–661.
- Karapanos, E., M. Hassenzahl, and J. B. Martens. User experience over time. *CHI'08 Extended Abstracts*, ACM, Florence, Italy, 2008: 3561–3566.
- Klimmt, C., T. Hartmann, and A. Frey. Effectance and control as determinants of video game enjoyment. *Cyberpsychology and Behavior*, 10(6), 2007: 845–848.
- Kujala, S., V. Roto, K. Väänänen-Vainio-Mattila, E. Karapanos, and A. Sinnelä. UX curve: A method for evaluating long-term user experience. *Interacting with Computers*, 23(5), 2011: 473–483.
- Leu, J. S. and N. H. Tung. Design and implementation of a reconfigurable mobile game controller on smartphone. *Wireless Personal Communications (WPC)*, Springer, New York, 74(2): 823–833, January 2014.
- MacKenzie, I. S. Fitts' law as a research and design tool in human-computer interaction. *Human-Computer Interaction*, 7(1), 1992: 91–139.
- McEwan, M., D. Johnson, P. Wyeth, and A. Blackler. Videogame control device impact on the play experience. In *Proceedings of the 8th Australasian Conference on Interactive Entertainment: Playing the System*, ACM, Auckland, New Zealand, 2012: 18.
- McNamara, N. and J. Kirakowski. Functionality, usability, and user experience: Three areas of concern. *Interactions*, 13(6), 2006: 26–28.
- Microsoft. Xbox One Wireless Controller. July 2, 2014. <http://www.xbox.com/en-IE/xbox-one/accessories/controllers/wireless-controller>.
- Natapov, D., S. J. Castellucci, and I. S. MacKenzie. ISO 9241-9 evaluation of video game controllers. In *Proceedings of Graphics Interface 2009, Canadian Information Processing Society*, Toronto, Canada, 2009: 223–230.
- Pham, T. P. and Y. Theng. Game controllers for older adults: Experimental study on gameplay experiences and preferences. In *Proceedings of FDG 12*, New York, 2012.

- Proctor, R. W. and T. V. Zandt., *Human Factors in Simple and Complex Systems*, CRC Press, Boca Raton, FL, 2011.
- Skalski, P., R. Tamborini, A. Shelton, M. Buncher, and P. Lindmark. Mapping the road to fun: Natural video game controllers, presence, and game enjoyment. *New Media and Society*, 13(2), 2010: 224–242.
- Sony Computer Entertainment America LLC. PS4™ Accessories. July 2, 2014. <http://us.playstation.com/ps4/ps4-accessories/>.
- Soukoreff, R. W. and I. S. MacKenzie. Towards a standard for pointing device evaluation, perspectives on 27 years of Fitts' law research in HCI. *International Journal of Human-Computer Studies*, 61, 2004: 751–789.
- Teather, R. J. and I. S. MacKenzie. Comparing order of control for tilt and touch games. In *Proceedings of the 2014 Conference on Interactive Entertainment*, ACM, Newcastle, Australia, 2014: 1–10.
- Thompson, M., A. I. Nordin, and P. Cairns. Effect of touch-screen size on game immersion. In *Proceedings of the 26th Annual BCS Interaction Specialist Group Conference on People and Computers*, British Computer Society, Swinton, UK, 2012: 280–285.
- Tractinsky, N., A. S. Katz, and D. Ikar. What is beautiful is usable. *Interacting with Computers*, 13.2, 2000: 127–145.
- Valve Corporation. Steam controller. July 2, 2014. <http://store.steampowered.com/livingroom/SteamController/>.
- Watson, D., M. Hancock, R. L. Mandryk, and M. Birk. Deconstructing the touch experience. In *Proceedings of the 2013 ACM International Conference on Interactive Tabletops and Surfaces*, ACM, St. Andrews, UK, 2013: 199–208.
- Willson, S. K. WinFitts: Two-dimensional Fitts experiments on Win32. January 18, 2001. <http://www.cs.uoregon.edu/research/hci/research/winfitts.html>.
- Zaraneek, A., B. Ramoul, H. F. Yu, Y. Yao, and R. J. Teather. Performance of modern gaming input devices in first-person shooter target acquisition. In *CHI'14 Extended Abstracts on Human Factors in Computing Systems*, ACM, Toronto, Canada, 2014: 1495–1500.
- Zhang, D., Z. Cai, K. Chen, and B. Nebel. A game controller based on multiple sensors. In *Proceedings of the International Conference on Advances in Computer Entertainment Technology*, ACM, Athens, Greece, 2009: 375–378.

## LIST OF ADDITIONAL SOURCES

- Cooper, A., R. Reimann, D. Cronin, and C. Noessel. *About Face: The Essentials of Interaction Design*. John Wiley & Sons, New Jersey, US, 2014.
- David, T. Y., S. C. Peres, and C. Harper. How well do people rate their performance with different cursor settings? In *Proceedings of the Human Factors and Ergonomics Society Annual Meeting*, 57(1), SAGE Publications, Thousand Oaks, US, 2013: 1561–1564.
- Lazar, J., J. H. Feng, and H. Hochheiser. *Research Methods in Human-Computer Interaction*. John Wiley & Sons, New Jersey, US, 2010.
- Lidwell, W., K. Holden, and J. Butler. *Universal Principles of Design, Revised and Updated: 125 Ways to Enhance Usability, Influence Perception, Increase Appeal, Make Better Design Decisions, and Teach through Design*. Rockport Publishers, Beverly, US, 2010.
- MacKenzie, I. S. *Human-Computer Interaction: An Empirical Research Perspective*. Newnes, Amsterdam, Netherlands, 2012.
- Norman, D. A. *The Design of Everyday Things*. Basic Books, New York, 2002.
- Preece, J., Y. Rogers, H. Sharp, D. Benyon, S. Holland, and T. Carey. *Human-Computer Interaction*. Addison-Wesley Longman Ltd., Boston, US, 1994.
- Rogers, Y., H. Sharp, and J. Preece. *Interaction Design: Beyond Human-Computer Interaction*. John Wiley & Sons, New Jersey, US, 2011.

## BIOGRAPHIES

---

**Gareth W. Young** is a PhD candidate of digital arts and humanities at University College Cork, Ireland. He earned his MSc in music technology from Dundalk Institute of Technology (2009) and his BEng in sound and broadcast engineering from Glyndŵr University (2008). In addition to his interests in engineering and music technology, Young has a postgraduate certificate in English Language Teaching. He is a part-time composer and has had his work performed at the Hilltown New Music Festival, Ireland, the INTIME Symposium, Coventry, and at both DKIT and UCC schools of music. Young's main topic of research is the design and evaluation of haptic feedback for digital musical instruments. You can find further information about his career, compositions, recordings, and research at [garetheyoung.org](http://garetheyoung.org).

**Aidan Kehoe** is a principal UX designer at Logitech Design Laboratory in Cork, Ireland. He studied for his PhD in the Computer Science Department at University College Cork, and has published papers in the areas of speech interaction and gaming. He is also the coauthor of several patents relating to game controller interaction.

**David Murphy** is a lecturer and researcher at the Department of Computer Science, University College Cork, Ireland. He is also a director of the Interactive Media Laboratory, UCC. David is the program director of both the MSc and postgraduate diploma in interactive media, and a codirector of the BA in digital humanities and information technology, UCC. His research interests include spatial sound, serious games, and virtual reality.

## KEY TERMS AND DEFINITIONS

---

**First-order control:** Where one or two actions are required to manipulate the velocity of display change or system response, for example, when using a thumbstick or joystick.

**Fitts' Law:** Used in HCI to describe the relationships between movement time, distance, and target size when performing rapid aimed movements. According to Fitts, the time it takes to move and point to a target of a specified width and distance is a logarithmic function of the spatial relative error.

**Functionality:** Refers to the capabilities, features, actions, and/or services of a device. During evaluation of the product, functionality of the device is evaluated for usability, effectiveness, reliability, usefulness, etc. Such evaluations may also highlight some additional desired functionality that should be incorporated in the device.

**Isometric:** A device that presents with a constant shape or is nonmoving (including pressure and force devices). An isometric device is a UI that senses force but does not perceptibly move. An example of an isometric controller would be the IBM TrackPoint.

**Isotonic:** A device that presents constant tension in operation (including displacement, free moving, or unloaded devices). An ideal isotonic device has zero or constant resistance. An example of an isotonic controller would be a mouse.

**Throughput:** Originally presented by Fitts as an index of performance (IP), “The average rate of information generated by a series of movements is the average information per movement divided by the time per movement.” However, it is more commonly referred to as TP, measured in bits per second (bps), in most contemporary experimentation involving these types of measurement.

**Usability:** An analysis that seeks to measure the interaction between the user and the device to ascertain if the device is capable of undertaking the tasks it is supposed to. Usability assessment is used to measure a device’s effectiveness, efficiency, and user satisfaction. Further descriptions of device transparency, learnability, and feedback mechanisms can be drawn from analyzing these data. The measure of usability is defined in ISO 9241-11 as “quality in use.”

**User experience:** Assessing a user’s experience can be somewhat problematic as the evocative nature of the relationship a user develops with certain types of technology can be idiosyncratic and diverse in its formative stages. Measurements are difficult to quantify and can be dependent on a number of contributing influences, such as psychological or social factors. An example might include personal opinions on aesthetics, a user’s exposure to advertising, or the social desirability of certain technologies.

**Zero-order control:** Where a single input action is required to directly manipulate the display position or other system response, for example, interactions that involve mice or Touchpads.

## APPENDICES

---



